RoHS

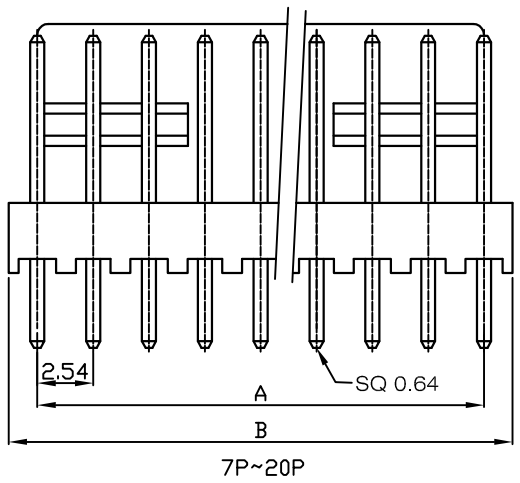

WAFER(180°)

Part No: KJ-2541WV
Material: pin: Brass tin-plated
Base: Nylon 66 UL94V-2
Circuits: 2-20circuits available
Insulation resistance: 1000MΩ min
Withstand Voltage: 1000V AC/minute
Current Rating: 3A AC/DC
Voltage Rating: 250V AC/DC

ORDERING INFORMATION:

KJ-2541WV-*P-* * (*)

- Part No
- Circuit No
- Color
- Special Material:PA46 6T V-0
- :Tin plated
  M:Matte-tin plated
  G:Gold flash
  G1:Gold 1u"

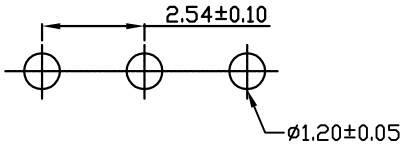

P.C.B LAYOUT

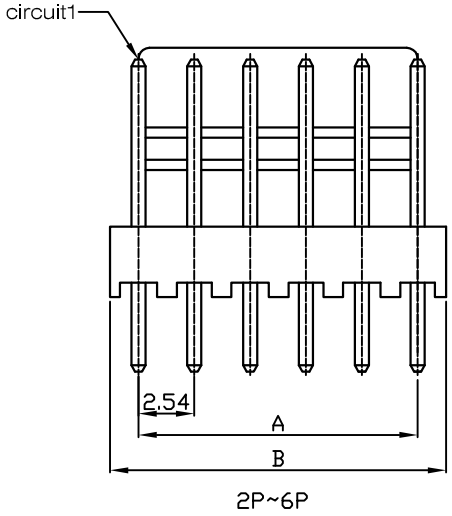

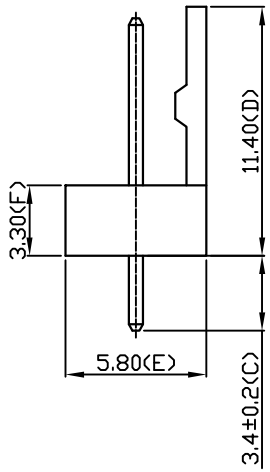

Dimensions

Circuit	A	B	Circuit	A	B
			11	25.40	27.94
2	2.54	5.08	12	27.94	30.48
3	5.08	7.62	13	30.48	33.02
4	7.62	10.16	14	33.02	35.56
5	10.16	12.70	15	35.56	38.10
6	12.70	15.24	16	38.10	40.64
7	15.24	17.78	17	40.64	43.18
8	17.78	20.32	18	43.18	45.72
9	20.32	22.86	19	45.72	48.26
10	22.86	25.40	20	48.26	50.80

KJ 東莞嘉英電子厂
JIA YING ELECTRONICS

DESCRIPTION:	MX2.54 WAFER 180°	UNIT:MM		繪圖 DRAWING:	吳華雄	比例（SCALE):	3:1
		ANGLE ±2°	DIM: .X±0.50 .XX±0.25 .XXX±0.10	審核 CHECKED BY	凌 輝	名稱（TITLE):	MX2.54 180°
PART NO:	KJ-2541WV	REV:A0		核准 APPROVAL BY	苗德蕙	存檔名稱（FILE):	KJ-2541WV
						日期（DATE):	2007/05/15
						PROJECTION:	