

A

B

C

D

E

RoHS

HOUSING

Part No: KJ-2501H

Circuits:2-16circuits available




Material: Nylon 66 UL94V-0

Insulation Resistance: 1000MΩ min

Withstand Voltage: 800V AC/minute

Current Rating: 3A AC/DC

Voltage Rating: 250V AC/DC

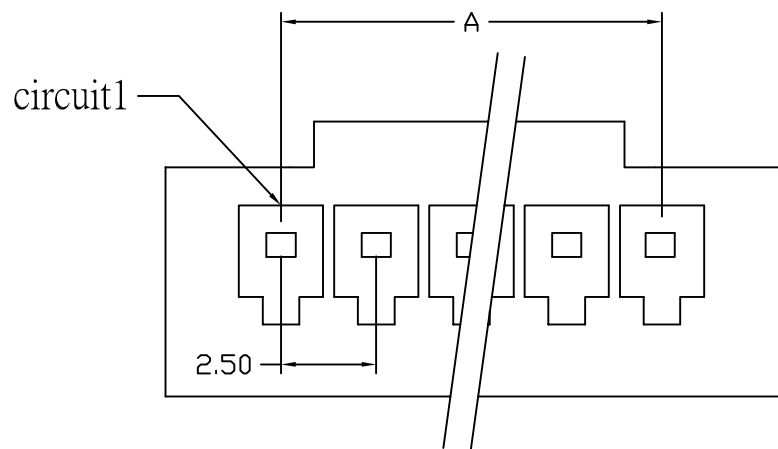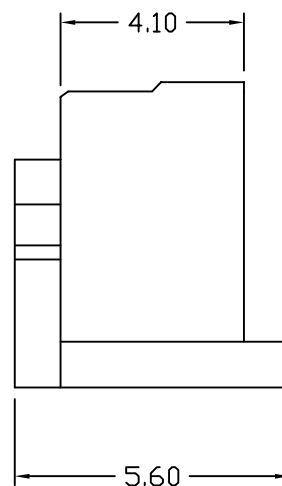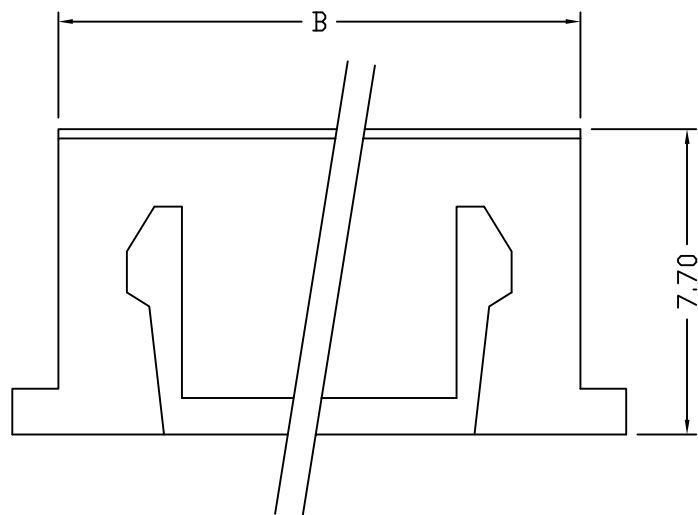

Dimensions

Circuit	A	B
2	2.50	5.70
3	5.00	8.20
4	7.50	10.70
5	10.00	13.20
6	12.50	15.70
7	15.00	18.20
8	17.50	20.70
9	20.00	23.20
10	22.50	25.70
11	25.00	28.20
12	27.50	30.70
13	30.00	33.20
14	32.50	35.70
15	35.00	38.20
16	37.50	40.70

KJ 東莞嘉英電子廠
JIA YING ELECTRONICS

UNIT:MM

繪圖
DRAWING:

王三星

比例 (SCALE):

3:1

DESCRIPTION:

XH2.5 HSG

ANGLE
±2°DIM:
.X±0.5
.XX±0.25
.XXX±0.10審核
CHECKED BY

凌輝

名稱 (TITLE):

XH2.5 HSG

PART NO:

KJ-2501H

REV:A0

核准
APPROVAL BY

苗德蕙

PROJECTION:

