

WAFER(180°)

Part No: KJ-2001WV

Material: pin: Brass tin-plated

Base: Nylon 66 UL94V-0

Circuits: 2-16circuits available

Insulation Resistance: 1000MΩ min

Withstand Voltage: 800V AC/minute

Current Rating: 3A AC/DC

Voltage Rating: 100V AC/DC

ORDERING INFORMATION:

KJ-2001WV-*P-*-* (*)

Part No

Circuit No







Special Material:PA46
6T

Color

:Standard type w/Kink
RK:Reversed Kink
NK:None Kink

:Tin plated
M:Matte-tin plated
G:Gold flash
G1:Gold 1u"

RoHS

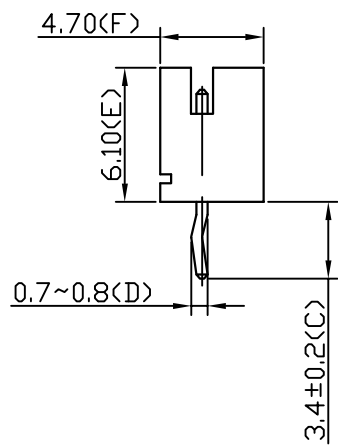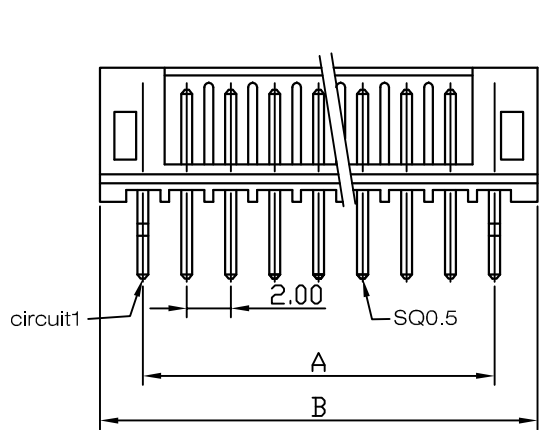

P.C.B LAYOUT

Dimensions

Circuit	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

KJ 東莞嘉英電子廠
JIA YING ELECTRONICS

UNIT:MM

繪圖
DRAWING:

吳華雄

比例 (SCALE):

7:1

DESCRIPTION:

PH2.0 WAFER 180°

ANGLE
±2°

DIM:
.X±0.50
.XX±0.25
.XXX±0.10

審核
CHECKED BY

凌輝

名稱 (TITLE):

PH2.0 180°

PART NO:

KJ-2001WV

REV:A2

核准
APPROVAL BY

苗德蕙

日期 (DATE):

2007/05/07

PROJECTION:

