
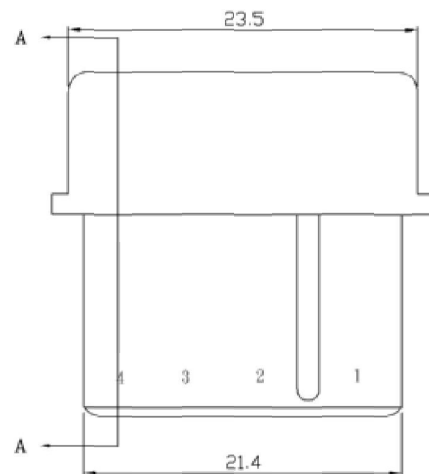
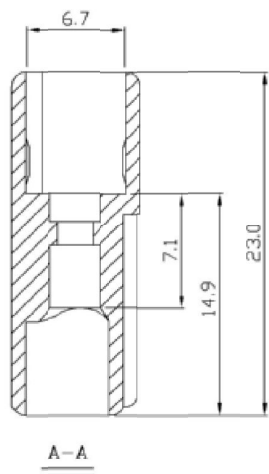


RoHS

SPECIFICATIONS

Part No: KJ-5080HF-4P
 Base: Nylon 66 UL94-V2
 Circuits:04P
 Insulation resistance: 1000M Ω min
 Withstand Voltage: 1500V AC/minute
 Current Rating: 10A AC/DC
 Voltage Rating: 250V AC/DC
 Temperature Range:-25°C ~+85°C

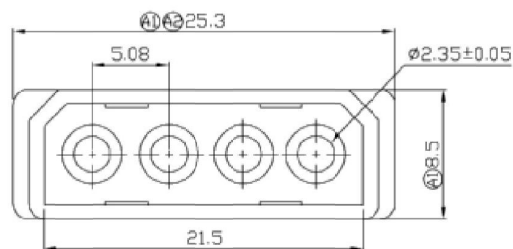

KJ 東莞嘉英電子廠

JIA YING ELECTRONICS

UNIT:MM

繪圖
DRAWING:

黃玲麗

比例 (SCALE):

2:1

名稱 (TITLE):

5.08mm HSG

存檔名稱 (FILE):

KJ-5080HF-4P

日期 (DATE):

2010/03/11

PROJECTION:



DESCRIPTION:

MX5.08 FEMALE HOUSING

ANGLE
 $\pm 2^\circ$

DIM:
.X ± 0.50
.XX ± 0.25
.XXX ± 0.10

審核
CHECKED BY

凌輝

核准
APPROVAL BY

苗德蕙

PART NO:

KJ-5080HF-4P

REV:A0