

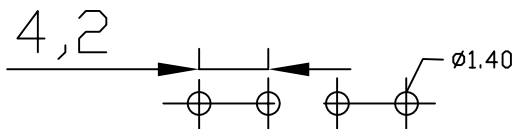


# WAFER(180°)

Part No: KJ-4259WV(A)-1  
 Material: pin: Brass tin-plated  
 Base: Nylon66 UL 94V-2  
 Circuits: 2-6circuits available  
 Insulation resistance: 1000MΩ min  
 Withstand Voltage: 1500V AC/minute  
 Current Rating: 9A AC/DC  
 Voltage Rating: 600V AC/DC

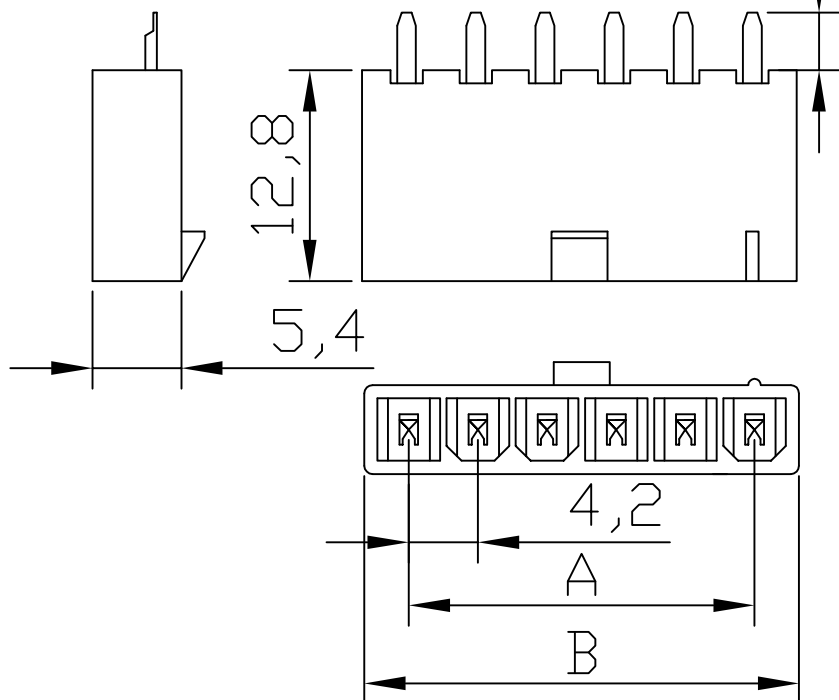

P.C.B. LAYOUT



## ORDERING INFORMATION:

KJ-4259WV(A)-1\* \*P-\*-\* (\*)

Part No

1 : Single Row


Circuit No

# RoHS

Special Material:PA46  
 6T  
 V-0

Color

:Tin plated  
 M:Matte-tin plated  
 G:Gold flash  
 G1:Gold 1u"

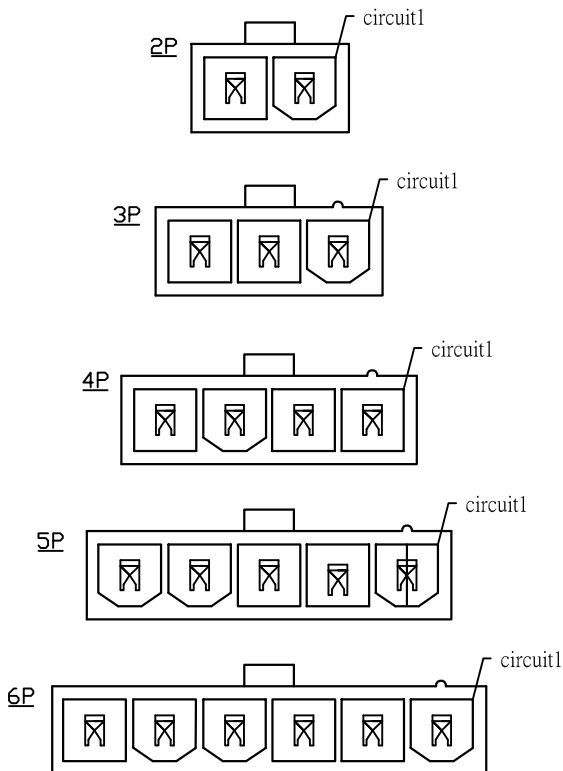

### Dimensions

circuit	A	B
1*2	4.20	9.60
1*3	8.40	13.80
1*4	12.60	18.00
1*5	16.80	22.20
1*6	21.00	26.40

**KJ** 東莞嘉英電子廠  
 JIA YING ELECTRONICS

UNIT:MM

繪圖  
 DRAWING:

吳華雄

比例 (SCALE):

2.5:1

DESCRIPTION:

MX4.2 MINI-FIT(空心PIN)

ANGLE  
 ±2°

DIM:  
 .X±0.30  
 .XX±0.20  
 .XXX±0.10

審核  
 CHECKED BY

凌輝

名稱 (TITLE):

MX4.2空心PIN

PART NO:

KJ-4259WV(A)-1

REV:A0

核准  
 APPROVAL BY

苗德蕙

PROJECTION:

