

# WAFER(180°)










Part No:KJ-4261WV-1  
 Material:pin:Brass Tin-Plated  
 Base: Nylon66 UL94-V2  
 Circuits:2-6circuits available  
 Insulation Resistance:1000MΩ min  
 Withstand Voltage:1500V AC/minute  
 Current Rating:9A AC/DC  
 Voltage Rating:600V AC/DC

RoHS

## ORDERING INFORMATION:

KJ-4261WV-1 × \*P-\*-\* (\* )

Part No  
 1 : Single Row  
 Circuit No  
 Special Material:PA46  
 6T  
 V-0  
 Color  
 :Tin plated  
 M:Matte-tin plated  
 G:Gold flash  
 G1:Gold 1u"

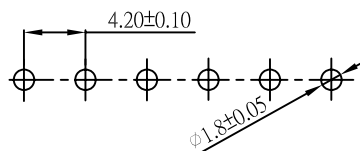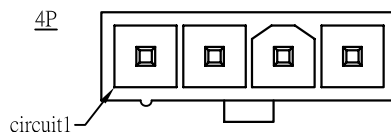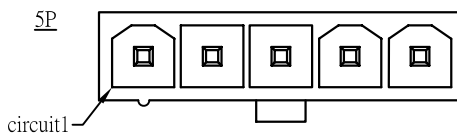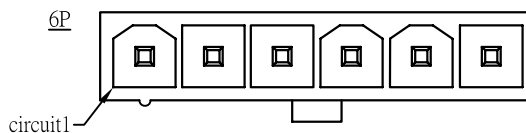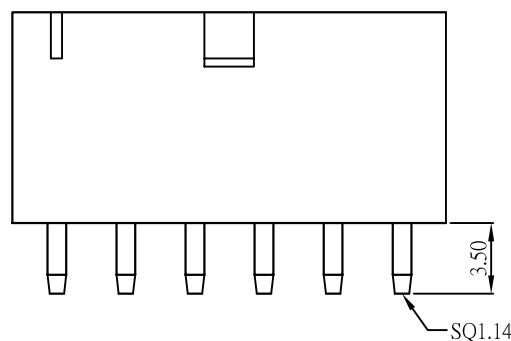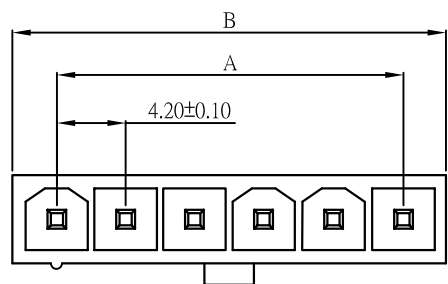

P.C.B. LAYOUT

## Dimensions

circuit	A	B
1*2	4.20	9.60
1*3	8.40	13.80
1*4	12.60	18.00
1*5	16.80	22.20
1*6	21.00	26.40

**KJ** 東莞嘉英電子廠

JIA YING ELECTRONICS

UNIT:MM

繪圖  
DRAWING:

黃玲麗

比例 (SCALE):

2.5:1

名稱 (TITLE):

MX4.2實心PIN


存檔名稱 (FILE):

KJ-4261WV

日期 (DATE):

2009/12/17

PROJECTION:



DESCRIPTION: MX4.2 MINI-FIT(實心PIN)

PART NO: KJ-4261WV-1

ANGLE  
±2°

DIM:  
.X±0.30  
.XX±0.20  
.XXX±0.10

審核  
CHECKED BY

核准  
APPROVAL BY

REV:A1