HOUSING

Part No: KJ-4257HM-2
Material: Nylon 66 UL 94V-2
Circuits: 2-24circuits available
Insulation resistance: 1000MΩ min
Withstand Voltage: 1500V AC/minute
Current rating: 9A AC/DC
Voltage rating: 600V AC/DC

ORDERING INFORMATION:

KJ-4257HM-2* *P-* (*)

- Part No
- 2 : Double Row
- Circuit No
- Color
- Special Material:V-0

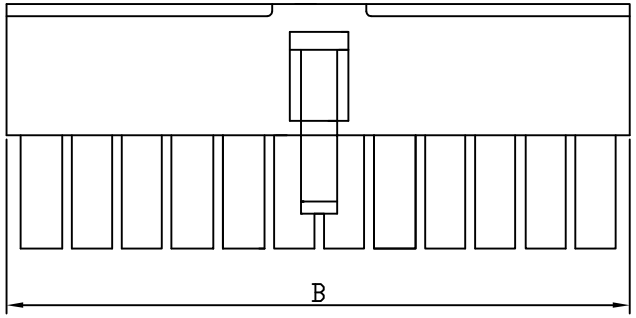



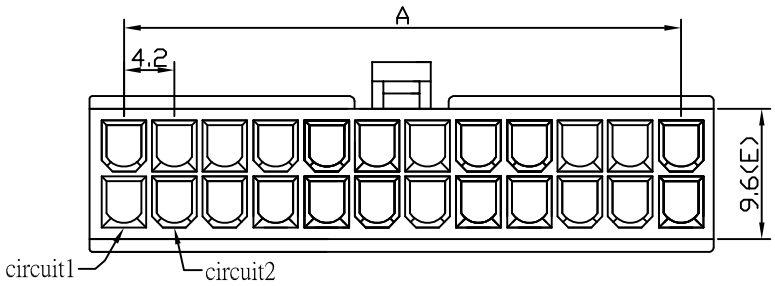

KJ-4257M-2*3P~2*12P





KJ-4257M-2*1P
KJ-4257M-2*2P

Dimensions

circuit	A	B	circuit	A	B
2*1	——	5.50	2*7	25.20	30.70
2*2	4.20	9.70	2*8	29.40	34.90
2*3	8.40	13.90	2*9	33.60	39.10
2*4	12.60	18.10	2*10	37.80	43.30
2*5	16.80	22.30	2*11	42.00	47.50
2*6	21.00	26.50	2*12	46.20	51.70

KJ 東莞嘉英電子廠 JIA YING ELECTRONICS		UNIY: mm	繪圖 DRAWING	吳華雄	比例 (SCALE): 2:1
		ANGLE ±2°			名稱 (TLTLE):4.2 Housing
DESCRIPTION:	MX4.2 MINI-FIT MALE HOUSING		審核 CHECKED BY	凌 輝	存檔名稱 (FILE):KJ-4257HM-2
		DIM: X.X ±0.30 X.XX±0.20 X.XX±0.10			日期 (DATE):2007/05/18
PART NO:	KJ-4257HM-2	REV:A2	核准 APPROVAL BY	苗德蕙	PROJECTION: