

RoHS

ORDERING INFORMATION:

KJ-3001WVS(B)-1 × \* P-\*


Part No

PIN  
:Matte-Tin Plated  
G:Gold Flash





SOLDERABLE RETENTION CLIP  
Matte-Tin Plated  
Matte-Tin Plated

1 : Single Row

Circuit No

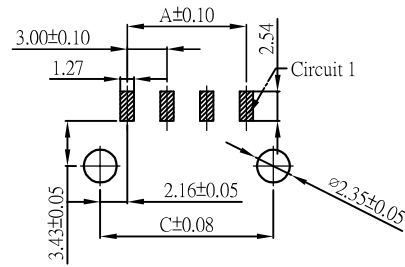

P.C.B LAYOUT

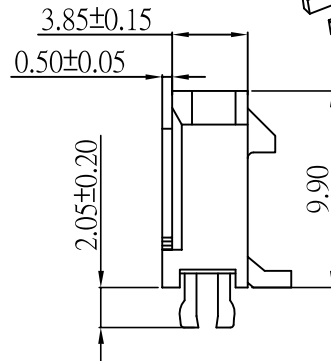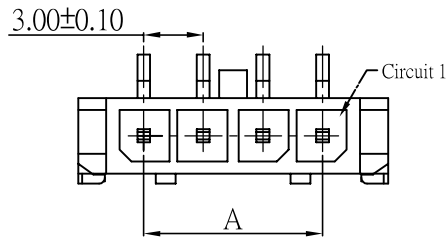

WAFER(180°)

Part No:KJ-3001WVS(B)-1

Material: Pin:Brass Matte-Tin Plated

Base:LCP UL94-V0,Black

Circuits:2-12

Contact Resistance:10mΩ Max

Insulation Resistance:1000MΩ Min

Withstanding Voltage:1500V AC/minute

Current Rating:5A AC,DC

Voltage Rating:250V AC,DC

Dimensions

circuit	A	B	C	circuit	A	B	C
1	-	6.65	-	7	18.00	24.65	22.30
2	3.00	9.65	7.30	8	21.00	27.65	25.30
3	6.00	12.65	10.30	9	24.00	30.65	28.30
4	9.00	15.65	13.30	10	27.00	33.65	31.30
5	12.00	18.65	16.30	11	30.00	36.65	34.30
6	15.00	21.65	19.30	12	33.00	39.65	37.30



東莞嘉英電子廠  
JIA YING ELECTRONICS

UNIT:MM

繪圖  
DRAWING:

黃玲麗

比例 (SCALE):

3:1

名稱 (TITLE):

MX3.0 180°


存檔名稱 (FILE):

KJ-3001WVS(B)-1

日期 (DATE):

2010/06/04

PROJECTION:



6

DESCRIPTION:

MX3.0 MICRO-FIT S/R SMT W180° 魚叉

ANGLE  
±2°

DIM:  
.X±0.50  
.XX±0.25  
.XXX±0.10

審核  
CHECKED BY

核准  
APPROVAL BY


PART NO:

KJ-3001WVS(B)-1

REV:A3

6

RoHS

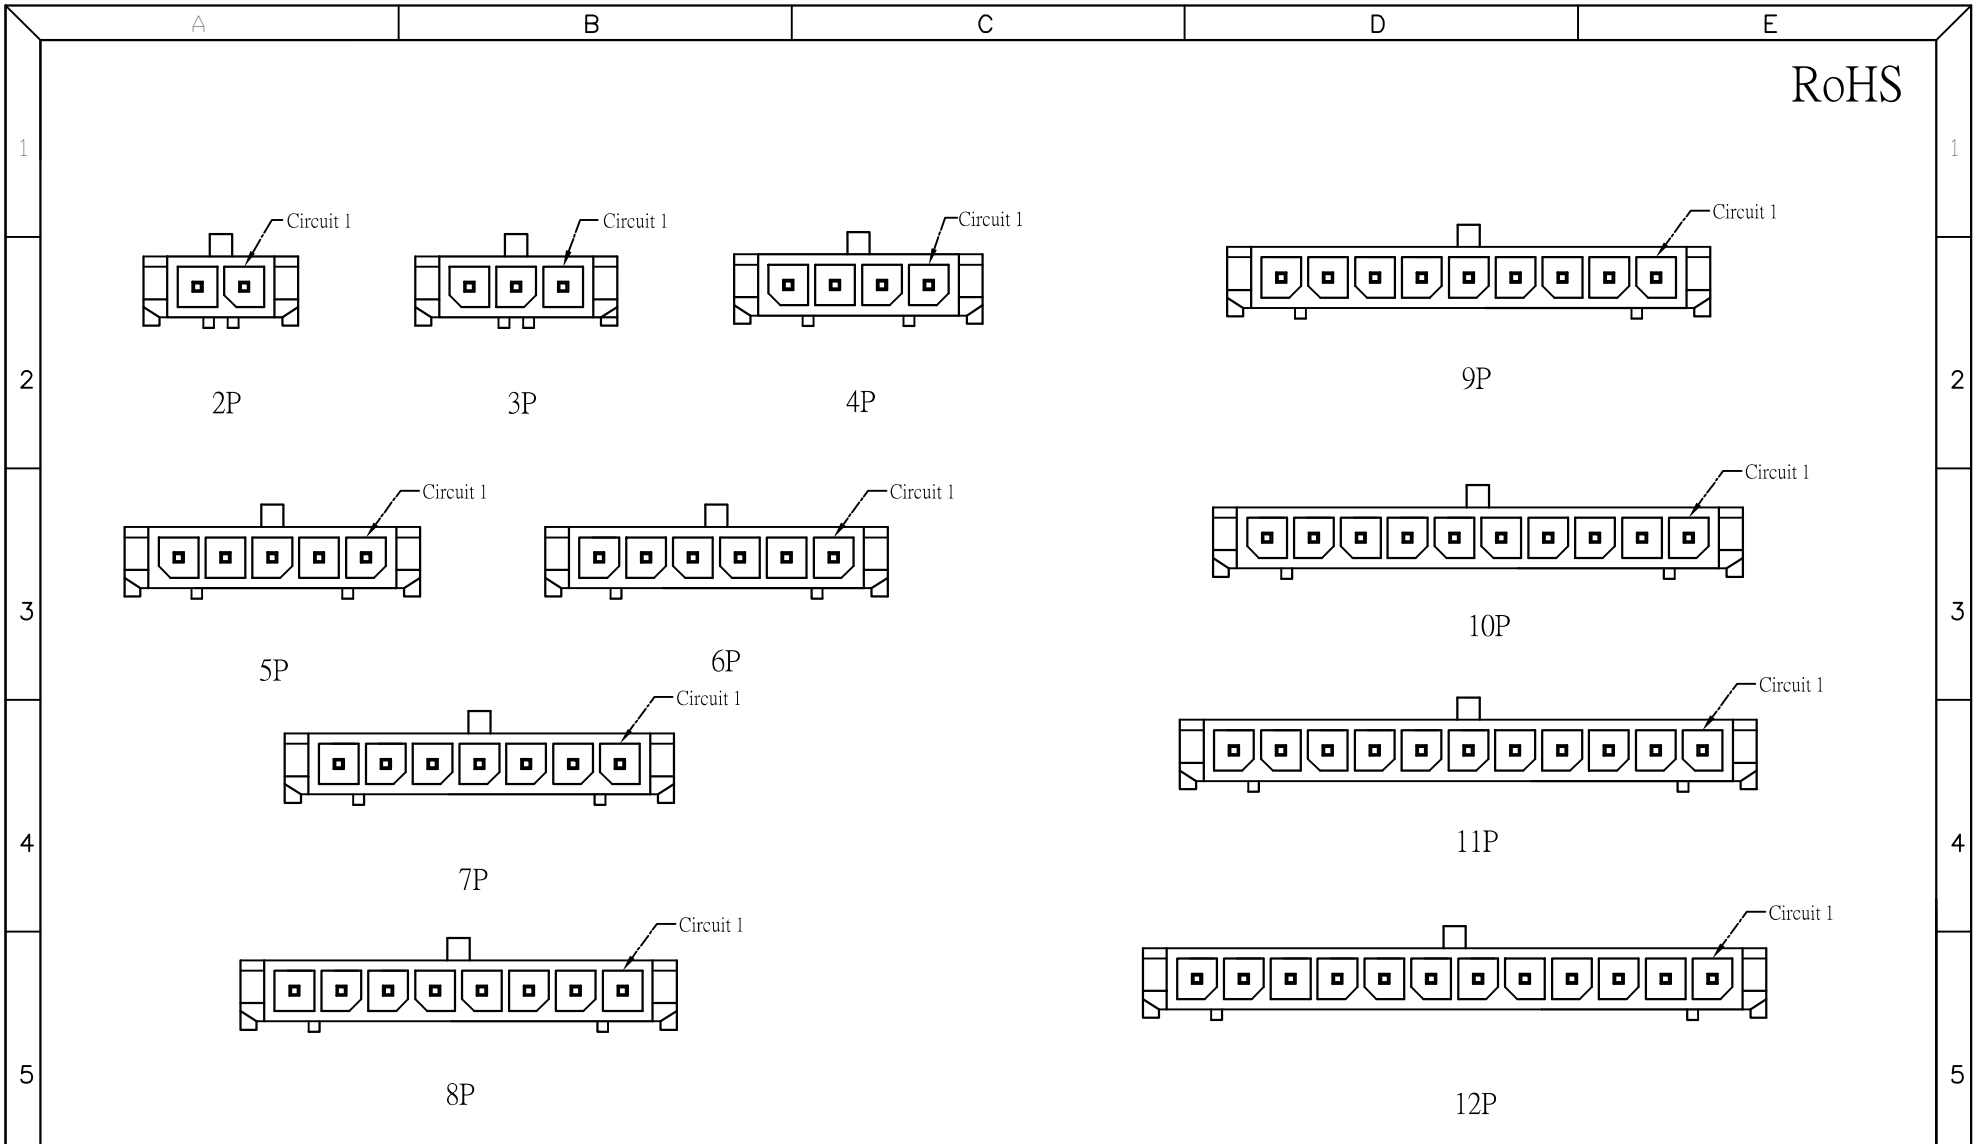

6	<b>KJ 東莞嘉英電子廠</b> JIA YING ELECTRONICS		UNIT:MM		繪圖 DRAWING:	黃玲麗	比例 (SCALE):	2:1
	DESCRIPTION:	MX3.0 MICRO-FIT S/R SMT W180° 魚叉	ANGLE ±2°	DIM: .X±0.50 .XX±0.25 .XXX±0.10	審核 CHECKED BY		名稱 (TITLE):	MX3.0 180°
	PART NO:	KJ-3001WVS(B)-1(孔位圖)			核准 APPROVAL BY		存檔名稱 (FILE):	KJ-3001WVS(B)-1(孔位圖)
				REV:A0			日期 (DATE):	2010/06/10
							PROJECTION:	